



SECURE YOUR FLOW

**PRODUCT SOLUTION FOR YOUR
PULPPAPER, TISSUE, CHEMICAL,
RAYON AND POWER INDUSTRY**



AUTHORIZED AGENT / DISTRIBUTOR / STOCKIST :



WIKA

PRESSURE GAUGE

Model : 232.50
Connection : 1/2" NPT/BSP Male
Range : As Data Sheet
Material : SS316/L
Size : 4" - 6"

WIKA

PRESSURE GAUGE SWITCH CONTACT

Model : PGS23
Connection : 1/2" NPT/BSP Male
Range : As Data Sheet
Material : SS316/L
Size : 4"

WIKA

PRESSURE TRANSMITTER

Model : UPT20
Connection : NPT
Range : 0...60.000 PSI

WIKA

PORTABLE PROCESS CALIBRATION

Model : CPG1500
Connection : 1/2 NPT Male
Range : As Data Sheet
Material : 316/L
Size : 5"

WIKA

TEMPERATURE GAUGE

Model : A52 & R52
Connection : 1/2" NPT Male
Range : As Data Sheet
Material : 316/L
Size : 4" - 6"

WIKA

TEMPERATURE GAUGE WITH CAPILLARY

Model : F73*(Gas Actuated)
Connection : 1/2" Capillary
Range : As Data Sheet
Material : SS316
Size : 4" - 6"

WIKA

RESISTANCE THERMOMETER

Model : TR-10
Connection : 1/2" NPT Male
Range : As Data Sheet
Material : Need Sizing

WIKA

THERMOWELL

Model : TW15, TW25
Connection : 1/2" NPT Male
Material : 316/L

WIKA

DIAPHRAGM SEAL

Model : 990.34
Connection : 1/2" NPT/BSP Male
Size : 4" - 6"
Material : 316/L

WIKA

PORTABLE PROCESS CALIBRATION

Model : CPH7000
Connection : G 3/8B - 1/4 NPT
Range : As Data Sheet

WIKA

PRESSURE TRANSMITTER

Model : S20
Connection : 1/2" NPT/BSP Male
Range : As Data Sheet
Material : 316/L

WIKA

TEMPERATURE CALIBRATION

Model : CTD9100
Range : As Data Sheet

WIKA

ORIFICE PLATE

Model : FLC
Material : SS316
Size : 2" - 24"
Pressure Rating : 150 - 10.000psi

WIKA

LEVEL MAGNETIC GLASS

Model : BNA
C to C : 490 ~ 550 mm
Connection : Flange
ANSI 300# | 600#
Design : Magnetic Level

WIKA

LEVEL SIGHT GAUGE

Model : LGG-RP
C to C : 490 ~ 550 mm
Connection : Flange ANSI 300#
Design : Reflex
Max. Temp : 243 Deg C
c/w mica shield

WIKA


Model : 910.15
Max. Pressure[bar] : 63
Max. Temp.[°C] : 400
Temp reduction : up to 100°C
For Horizontal Mount/Pipe : Syphon 'O'
For Vertical Mount/Pipe : Syphon 'U'

WIKA

LEVEL FLOAT SWITCH

Model : HLS-S
Proses Conn. : Flange End
Op Temp. : T=-120...+350°C
Op Press. : P=Vacuum to 232 bar
Limit Density : $\rho \geq 500 \text{ kg/m}^3$

WIKA

MAGNETOSTRICTIVE LEVEL TRANSMITTER

Model : FLM
C to C : up to 4000m
Op Temp. : T=-90...+450°C
[-130...+842°F]
Op Press. : P=Vacuum to 100 bar
[1,450.4 psi]
Limit Density : $\rho \geq 400 \text{ kg/m}^3$
[25.0 lbs/ft³]

WIKA

ULTRASONIC FLOW METER

Model : FLC - UFL
Size : DN50 - DN750
Temperatures of : -30°C [22°F] up to +80°C [+176°F]

WIKA


SF6 GAS ANALYZER
Range : As data sheet



FLANGE GLOBE VALVE

Model : GBV-201
Conn. : ANSI 150 | 300
Body : A216-WCB | CF8 | CF8M
Trims : 13Cr | Stellite | CF8 | CF8M
Size : 1/2" - 24"



GATE VALVE

Model : GV-202
Conn. : Flange ANSI150#
300#/600#
Body : A216-WCB
CF8 | CF8M
Trims : 13%Cr | Stellite CF8 | CF8M
Size : 2" - 24"



SWING CHECK VALVE

Model : SC-209
Connection : JIS 10K
ANSI150#/300#
Body : Cast iron |
Cast steel
Trims : 13Cr | Stellite
Size : 2" - 24"



FLANGE BUCKET STRAINER

Model : STV - 204B
Connection : ANSI 150
Body Material : A234 WPB
| SS304 | SS316
Screen : SS316 mesh #20 #40
Size : 2" - 24"



LINED BALL VALVE

Model : BV-202
Connection : Flange PN 16 | ANSI 150
Body : WCB
Seat : PTFE/PFA/FPE
Disc : SS316 + PFA
Size : DN50 - DN600



LINED BUTTERFLY VALVE

Model : BV-10
Connection : Wafer PN16 | ANSI150
Body : WCB
Seat : PTFE/PFE/FPE
Disc : SS316 + PFA
Size : DN50 - DN800



BUTTERFLY VALVE

Model : BV-10
Connection : Wafer | Lug | Flange
ANSI 150|300, PN16|40
Body : Cast Iron | Ductile Iron
Size : DN50 - DN700



GLOBE VALVE BELOW SEAL

Model : GBV-202 BS
Conn. : ANSI 150 | 300 | PN 16 | 40
Body Mat. : A216-WCB | GG25
| CF8 | CF8M
Trim : 13Cr | Stellite | CF8 | CF8M
Size : 1/2" - 24"



BALL VALVE 1 PCS BODY

Model : BV 101
Connection : Screw NPT | BSP
Body : CF8M | CF8
Size : DN6 - DN100



MANUAL BALL VALVE

Model : BV-202
Connection : Flange 150# / 300#
Body : Cast Steel
CF8 | CF8M
Trims : CF8 | CF8M
Size : 1/2" - 12"



BALL VALVE 3 PCS BODY

Model : BV 301
Connection : Butt Weld |
Socketed Weld
Screw NPT | BSP
Body : CF8M | CF8
Size : DN15 - DN100



KNIFE GATE

Model : 200 EA
Connection : Wafer PN16 | ANSI150
Body : CF8M | CF8 | CI
Stem : 17 - 4 PH
Size : DN15 - DN350



SUPERLITE CHECK VALVE

Model : 200 EA
Connection : JIS 10K |
PN16 | ANSI150
Material : CF8M | CF8 | CI
Size : DN40 / DN300



DISCO CHECK VALVE WAFER

Model : DC-207
Connection : Wafer PN 16/40
Body : A351-CF8M
Trims : SS316
Spring : SS316
Size : 1/2" - 12"



DOUBLE DOOR CHECK VALVE

Model : DD 205
Connection : Wafer JIS 10K | PN 16
ANSI 150
Body : CF8M | CF8 | CI | WCB
Size : DN50 - DN900



TILTING CHECK VALVE

Fig : 113 BM
Connection : Wafer PN 16/ANSI 150
Body : SS316
Disc : SS316
Seat : SS316
Size : 2" - 12"



Y - STRAINER

Model : STF - 203F
Conn. : Flange PN 16 | PN 40 |
ANSI 150 | 300
Body : CF8 | CF8M | CI
Size : DN15 - DN350



NEEDLE VALVE

Model : NV 210
Connection : Screw NPT | BSP
Body : CF8m | CF8
Size : DN6 - DN100



PVC DIAPHRAGM VALVE

Model : PV111
Connection : Flange JIS10K
PN16 | ANSI 150
Material : PVC / PVDF
Size : DN15 / DN350



PVC BALL VALVE

Model : RPV 131/W
Connection : DIN, ANSI
JIS, CNS, NPT
Material : PVC - U
Pressure Rate : PN1.0Mpa
Size : DN15 - DN100




HIGH PERFORMANCE BALL VALVE

Model : 16i | 26i
Connection : Butt welded | Screw end
Body/Ball : A351-CF8M
Seat : Multifill |
33% Carbon Filled
Size : DN 15 - DN 150




HIGH PERFORMANCE BUTTERFLY VALVE

Model : MS Series
Conn. : Wafer type to JIS 10K
ANSI 150
Body : ASTM A351-CF8 | SS304
Disc : ASTM A351-CF8 | SS304
Seat : Metal Seat - SS316/L
CNC Precision Machined
Size : DN50 ~ DN600




SEGMENT BALL VALVE

Model : SB Series
Conn. : Wafer type to PN16
Body : ASTM A351-CF8 | SS304
Ball : ASTM A351-CF8
+ Hard Chrome | SS304 + Hrc
Seat : SS316/L
Size : DN25 ~ DN500




PNEUMATIC BALL VALVE

Model : BV 202
Conn. : Flange ANSI 150/300
Body : CF8M | CF8
Disc : CF8M | CF8
Seat : PTFE | CF8M
Size : DN15-DN250




THERMODYNAMIC STEAM TRAP

Model : DT42/2
Connection : Screw NPT
Body Material : A216WCB
/ Carbon Steel
Disc/Seat Mat. : Hardened St. Steel
Size : DN 15 to DN 25




STEAM TRAP INVERTED BUCKET

Model : 1B - 12
Connection : Screw Female
/ Flange End
Body Material : SG Iron
Size : 1/2" - 2"




BALL FLOAT STEAM TRAP

Model : FLT17
Connection : Flanged PN 16
Body Material : SG iron
Float/Seat Mat. : SS304/ SS303
Auto. Air Vent : Stainless steel;
Bimetallic
Size : DN 15 ~ DN 50




PRESSURE REDUCING VALVE

Model : RP-45S
Connection : PN16 - PN40
Body Material : A216WCB
/ Carbon Steel
Disc/Trim Material : Hardened St. Steel
Size : DN15 ~ DN150




CONTROL VALVE

Model : V 16/2
Connection : Flange End
Body Material : SG Iron / Carbon Steel
/ Stainless Steel
Size : DN15 - DN150




TURBINE FLOWMETER

Fig : KF500
Body : SS304
Connection : Flange end to PN16
Power supply : 85-265VAC
(50 HZ/60HZ) 24 VDC
Max Temp. : 100 Deg C
Size : 2"




MAGNETIC FLOWMETER

Material : SS316
Power supply : 85% RH
Env. Humidity : 1.6Mpa
Pressure : 4 to 20 mA, RS485
Connection : Flange End PN16
/ ANSI 150
Size : 6"




EXPANSION JOINT

Model : BM400
Connection : SS304 | SS316
Body Material : Flange ANSI 150 | 300
Size : DN 50 - DN 500

ACCESSORIES




ROTORK E/P POSITIONER

Model : YT Series
Body : Aluminium
Protection : IP65 | Ex-proff
Design : 4 to 20mA | HART




SOLENOID VALVE

Model : NAMUR Series
Voltage : 24 VDC
Port Size : G 1/4 5/2 way
spring return




LIMIT SWITCH BOX

Model : NTS Series
Body : Aluminium
Type : Double acting
Design : Electric drive




PNEUMATIC ACTUATOR

Model : DA Series
Body : Aluminium
Type : Double acting
Design : Rack & Pinion
Size valve : 1/2" - 32"
Torque : 65 PSI




GLAND PACKING

Model : R15-A
Material : PTFE GFO 100%
PH Range : 0 to 14 PH
Line Speed : 2700 fpm
Size : 10mm - 30mm





GLAND PACKING

Model : R15-C
Material : Pure PTFE
PH Range : 0 to 14 PH
Line Speed : 2700 fpm
Size : 10mm - 30mm



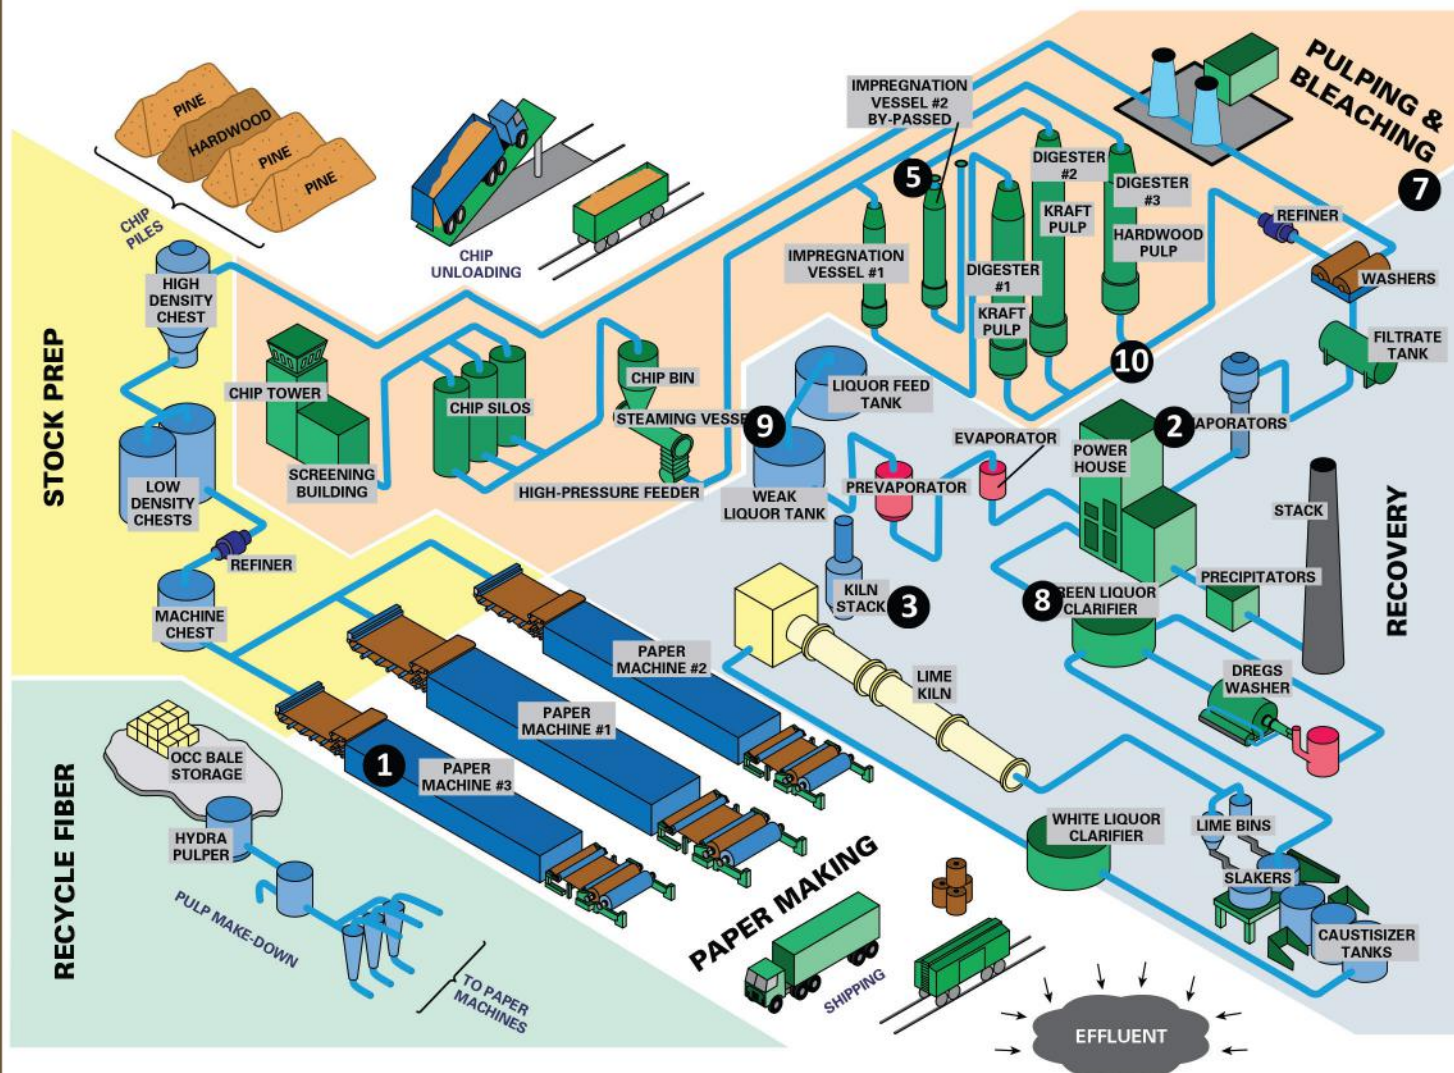

GLAND PACKING

Model : R15-H
Material : Aramid PTFE
PH Range : 2 to 12 PH
Line Speed : 2700 fpm
Size : 10mm - 30mm

SPIRAL WOUND GASKET

Model : SWG
hoop : SS316L
Outer : SS316L
Inner : SS316L
Filler : Graphite
Size : DN50 - DN600



APPLICATIONS

1



DIAPHRAGM SEAL

Model : 990.34
Connection : 1/2" NPT /BSP Male
Size : 4" - 6"
Material : 316/L

2



FLANGE GLOBE VALVE

Model : GBV-201
Conn. : ANSI 150 | 300
Body : A216-WCB | CF8 | CF8M
Trims : 13Cr | Stellite | CF8 | CF8M
Size : 1/2" - 24"



LEVEL SIGHT GAUGE

Model : LGG-RP
C to C : 490 ~ 550 mm
Connection : Flange ANSI 300#
Design : Reflex
Max. Temp : 243 Deg C
c/w mica shield

3



RESISTANCE THERMOMETER

Model : TR-10
Connection : 1/2" NPT Male
Range : As Data Sheet
Material : Need Sizing

4



KNIFE GATE

Model : 200 EA
Conn. : Wafer PN16 | ANSI150
Body : CF8M | CF8 | CI
Stem : 17 - 4 PH
Size : DN15 - DN350

5



HYPER CONDENSATE BALL VALVE

Model : SB Series
Conn. : Wafer type to PN16
Body : ASTM A351-CF8 | SS304
Ball : ASTM A351-CF8
+ Hard Chrome | SS304 + Hrc
Seat : SS316/L
Size : DN25 ~ DN500

6



GLOBE VALVE BELOW SEAL

Model : GBV-202 BS
Conn. : ANSI 150 | 300 | PN 16 | 40
Body Mat. : A216-WCB | GG25
| CF8 | CF8M
Trim : 13Cr | Stellite | CF8 | CF8M
Size : 1/2" - 24"

7



GLAND PACKING

Model : R15-A
Material : PTFE GFO 100%
PH Range : 0 to 14 PH
Line Speed : 2700 fpm
Size : 10mm - 30mm

8



LINED BUTTERFLY VALVE

Model : BV-10
Conn. : Wafer PN16 | ANSI150
Body : WCB
Seat : PTFE/PFE/FPE
Disc : SS316 + PFA
Size : DN50 - DN800

9



DIAPHRAGM VALVE

Model : PV111
Conn. : Flange JIS10K
PN16 | ANSI 150
Material : PVC / PVDF
Size : DN15 / DN350

10



GATE VALVE

Model : GV-202
Conn. : Flange ANSI150#
300#/600#
Body : A216-WCB
CF8 | CF8M
Trims : 13%Cr | Stellite CF8
| CF8M
Size : 2" - 24"



8 HAL

Alasan kami di percayai
oleh pelanggan kami
dengan product berkualitas

Safety Packaging

Certify Technical Team

BERPENGALAMAN LEBIH DARI 15 TAHUN

Warehouse Management

6 Lines Assembly in House

Same Day - Fast Delivery

100% QA & QC test - Check

Manufacture Price

100% Traceability



CERTIFY TECHNICAL SUPPORT



100% TRACEABILITY



6 LINE ASSEMBLY



SAMEDAY DELIVERY



SAFETY PACKAGING

100% QUALITY ASSURANCE & CONTROL TESTED



PMI Test

(Positive Material Identification)



Test Bench

(Alat Penguji Kebocoran pada valve s/d 400 barG)



Thickness Test

(Alat Penguji Ketebalan Valve)



Hardness Test

(Alat Penguji Kekerasan Valve)

MEDAN OFFICE / WAREHOUSE

Jl. Sangir Talaud I KIM IV, Pematang Johar
Labuhan Deli - Kabupaten Deli Serdang
Sumatera Utara 20373 Indonesia
Email : sales@bjmsgroup.com
Telp: 061 - 4273 1118, Fax : 061 - 4273 1119

JAKARTA OFFICE / WAREHOUSE

Jl. Daan Mogot, KM.18
Green Sedayu Bizpark Unit DM 5 No.2
Jakarta Barat 11840 Indonesia
Telp. : (021) 2252 2441, Fax : (021) 2252 2442



www.bjmsgroup.com



0811 - 6158 - 502



sales@bjmsgroup.com



bjmsonline



bjmsonline



bjmsonline



+62811 6158 502



www.bjmsgroup.com



www.bjmsonline.com



sales@bjmsgroup.com